


注释:

- 1.材料: 紫外熔融石英
- 2.入射角: $0\pm2^\circ$
- 3.光洁度: 60-40
- 4.中心波长: 1064nm
- 5.半带宽: 4.0 nm (typical);
7.4 nm (maximum)
- 6.透过带: $T_{\text{abs}} > 90\%$ 1064nm
- 7.截止带1: $OD_{\text{abs}} > 6$ @978.9-1048nm
- 8.截止带2: $OD_{\text{abs}} > 5$ @1048-1053.4nm
- 9.截止带3: $OD_{\text{abs}} > 6$ @1080-1170.4nm
- 10.截止带4: $OD_{\text{abs}} > 5$ @1074.6-1428.9nm
- 11.激光损伤阈值: $0.1\text{J}/\text{cm}^2$ @532nm (10ns pulse width)

注:

- 1: 仅供参考, 禁止使用本图加工生产.
- 2: 图纸细节如有更改不再另行通知.

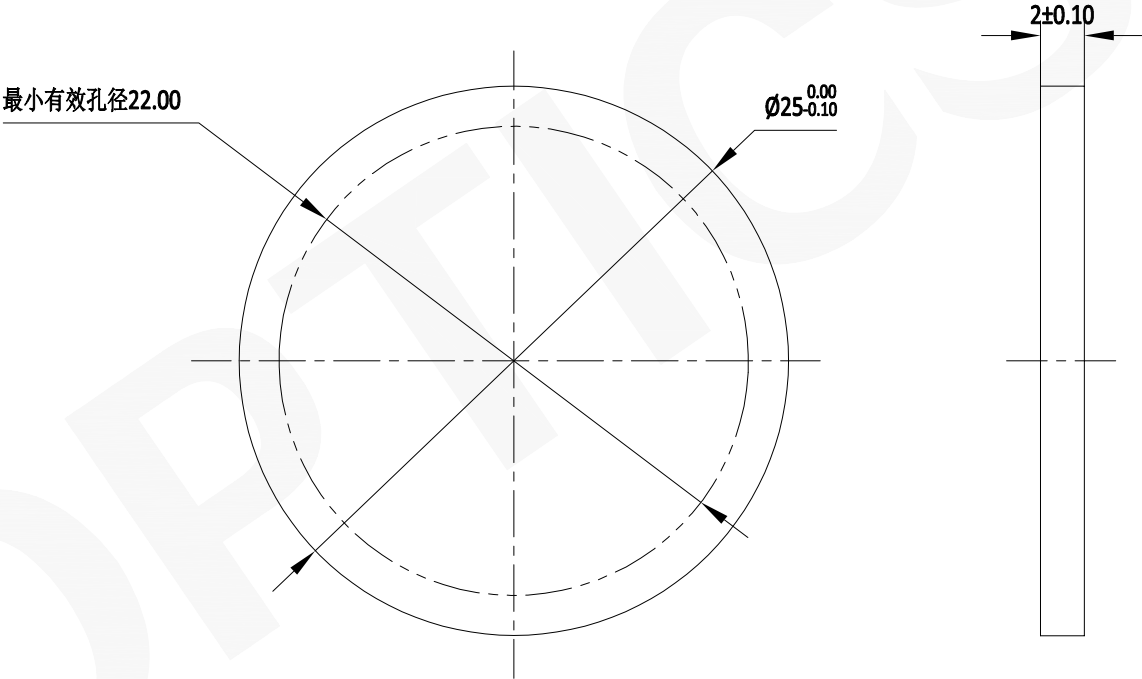

联合光科技（北京）有限公司

名称

高性能窄带带通滤光片-未封装
D=25.00mm

产品编号

199459

单位

mm

